

SPECIFICATIONS

Voltage	220V-240VAC / 100V-240 VAC
Width / Height	W50mm x H85mm
Length	1182mm
Power (W/m /ft)	31.1 W/pc
Efficacy Up to	90lm/w
Control	Dali , 0-10V, on/off

LED CHIPS AND DRIVER OPTIONS



SPECIFICATIONS

	2700K	3000K	3500K	4000K	5000K	6500K
RA 80	2399lm / 1.2m	2526lm / 1.2m	2659lm / 1.2m	2799lm / 1.2m	2799lm / 1.2m	2799lm / 1.2m
RA 90	2127lm / 1.2m	2020lm / 1.2m	1919lm / 1.2m	2239lm / 1.2m	2239lm / 1.2m	2239lm / 1.2m
RA 95	1914lm / 1.2m	1818lm / 1.2m	1727lm / 1.2m	2015lm / 1.2m	2015lm / 1.2m	2015lm / 1.2m
SAMSUNG RA80	2393lm / 1.2m	2273lm / 1.2m	2159lm / 1.2m	2519lm / 1.2m	2519lm / 1.2m	2519lm / 1.2m

Note:


- The given data are typical values in 4000K CRI80+. Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- 15% less on luminous flux at Traic driver,DALI and 0/1-10V driver, and -10% Non-Dim driver.
- Above data based on Non-Dimmable for all luminaires.
- More customized LED and CCT available.

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY ¹	COLOR TEMP ²	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
U5085L	W White B Black S Silver	AS- Asymmetric PMMA Lens	4- 1182mm	3 3-Step MacAdam Ellipse	30- 3000K 40- 4000K 50- 5000K 65- 6500K	80 80+ CRI 90 90+ CRI	TLR- Trimless Recessed	22 IP22	D1- DALI D2- 0-10V D3- On/off

1. Blueview's standard is 3-Step MacAdam
 2. The listed Color Temperature is only available in CRI80+ in Nichia Chips. For more options, pls. check with your executive sales.
 3: Nichia's CRI 90+ option's is not the general inventory, the leading time is around 4weeks for it. Please check with your executive sales in details.

BEAM ANGLE



ASYMMETRIC OPTICAL LENS



LUZ Series is linear LED lighting fixture that features a Down lighting. It's mostly simulating the natural lighting enviroment. Fixture features 80+ or 95+ Ra LEDs. White color from 2700K to 6500K. Dimmable driver available in Dali, 0/1-10V,DMX, PWM type. Fixture lengths are available in 2ft,4ft,5ft and 8ft, and custom lengths are available in 19.6ft.

- ▶ PC diffuser Mostly simulating thenatural lighting
- ▶ Sus-Pendant, Ceiling/Wall Mounted, Trimless Recessed installation
- ▶ Designed and engineered with the architectural specifier in mind
- ▶ Refined construction and classic linear illumination

RANGE OF APPLICATIONS

General or local lighting in Office, Educational Instiutuions, Conference Rooms and many other workspaces.

ELECTRIC GEAR


Constant current 0-10V / DALI / Non-dim dirvers, Setable white, Dual white / Dime2Warm, DMX, PWM lighting solution available.

ACCESSORIES




Trimless Recessed Kit

DIMENSION



Unit:mm[in]


DIMENSION

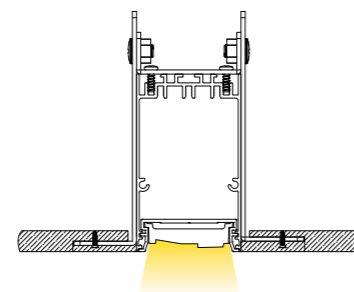

Trimless Recessed

INSTALLATION

Caution: Turn off power to electrical box before installing!

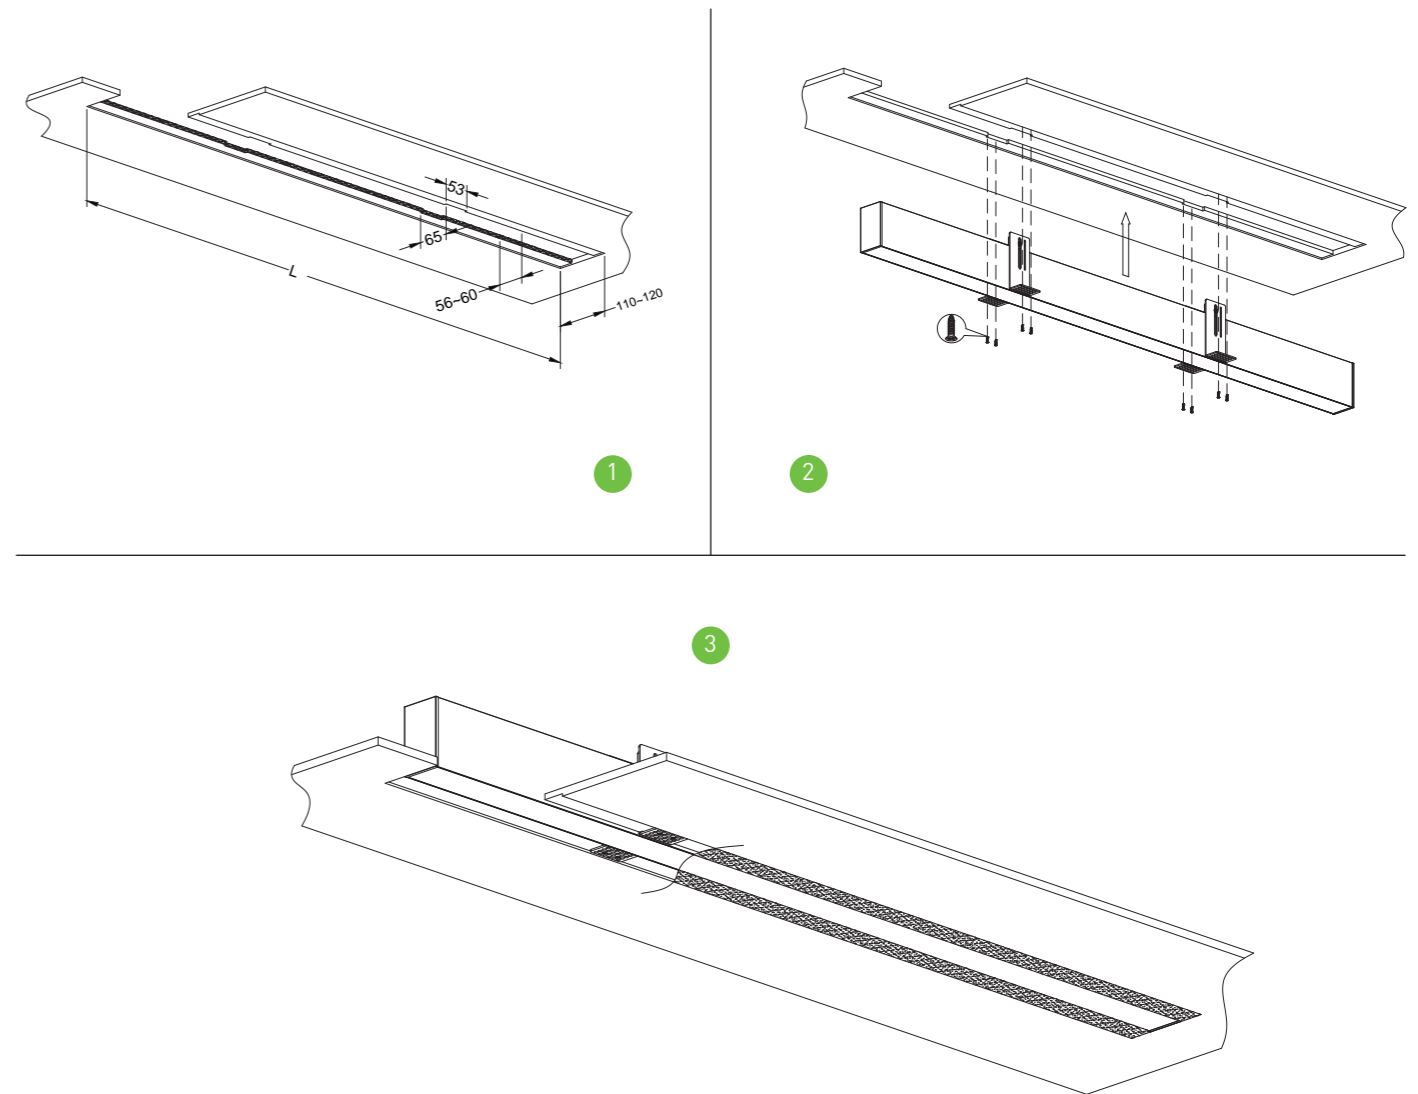

- 1 Cut a hole on the ceiling, and make sure the size width is 56-60mm, length is same as luminaire's.
- 2 Wiring the luminaire to AC.
- 3 Insert the luminaire into the hole, and lock it by the Philips screws on 2 sides into the ceiling through the brackets.
- 4 Mud the bracket with ceiling together, and peel the protection film on the lens after the installation. Clean the luminaire if there is some dust/mud left on the lens.



INSTRUCTIONS FOR INSTALLATION AND USE

WARNING : The security of this equipment is guaranteed only with compliance of these instructions, so you must keep them. Installation and all non-routine maintenance must be carried out only by qualified personal.

Disconnect power before taking any action on the fitting.

Blueview is not responsible for any damage to persons and/or property resulting from improper installation, misuse, or unauthorized modifications made to their products.

Obtain the correct power supply unit (accessory not included), install it in a remote location and prepare the cables for their connection

Connect to the power supply (PAYING ATTENTION TO OBSERVE POLARITY, parallel connection)

Explanation of the symbols on the label.

Due to a program of continuous improvement information is subject to change without notice.

© Blueview 2020 – All rights reserved. Made in China.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258

Mail: sales@blueviewled.com

Web.: www.blueviewled.com

Add: No.1000, Konggang 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, China. 610207