

ORDERING INFORMATION

LUMINAIRE	FINISH	LENS	LENGTH	COLOR QUALITY ¹	COLOR TEMP ²	CRI	INSTALL ACCS.	IP GRADE	CONTROL OPTOINS
035	W White	S Silicone	6 φ 600mm	3 3-Step MacAdam Ellipse	27 - 2700K	80	P Horizontal Pendant	22 IP22	D1 - DALI
	B Black	D Diffuser	9 φ 900mm	5 5-Step MacAdam Ellips	30 - 3000K	80+ CRI			D2 - 0-10V
	S Silver		12 φ 1200mm		35 - 3500K	90			D3 - On/off
					40 - 4000K	90+ CRI			
					50 - 5000K	95			
					60 - 6000K	95+ CRI			
			65 - 6500K						

1. Blueview's standard is 3-Step MacAdam
 2. The listed Color Temperature is only available in CRI80+ in Epistar Chips, for 95+, 90+ in Epistar and Sumsung chips, pls. check the list on following page. For more options, pls. check with your executive sales.


SPECIFICATION

Voltage	220V-240VAC / 100V-240 VAC		
Width / Height	35 × 30mm		
Diameter	φ 600mm	φ 900mm	φ 1200mm
Power (W/m /ft)	25W/pc	34 W/pc	70 W/pc
Efficacy Up to	80lm/w	80lm/w	80lm/w
Control	Dali , 0-10V, on/off		

LED CHIPS AND DRIVER OPTIONS



DIMENSIONS



Unit:mm[in]

ACCESSORIES



Aircraft Cable Pendant Kit



035 Ring light is built by Alu. extrusion fixture with Silicone lens. It's creating smooth and comfort lighting without spot. The light sourced are available up to 95+ Ra. Color temperature options from 2700K to 6500K, Dual white at WW+NW available. DMX dimmable available. Ring diameter available in φ600mm, φ900mm, φ1000mm and customized size.

- ▶ Double Sided lighting.
- ▶ Aluminum extruded and bend fixture for good heat dissipation.
- ▶ Flexiable Matt Silicone Lens Spot-less.
- ▶ Designed and engineered with the architectural specifier in mind



RANGE OF APPLICATIONS

General or local lighting in Resting Zoon, Reception, Club, Retail Restaurants, Residential, etc.


ELECTRIC GEAR

Constant voltage 0-10V / DALI / DMX / Non-dim dirvers, SAMSUNG or OSRAM SMD LED.

DIMENSION

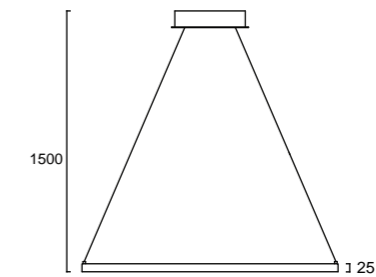


Unit: mm



Unit:mm[in]

FOR: SUSPENSION LIGHT

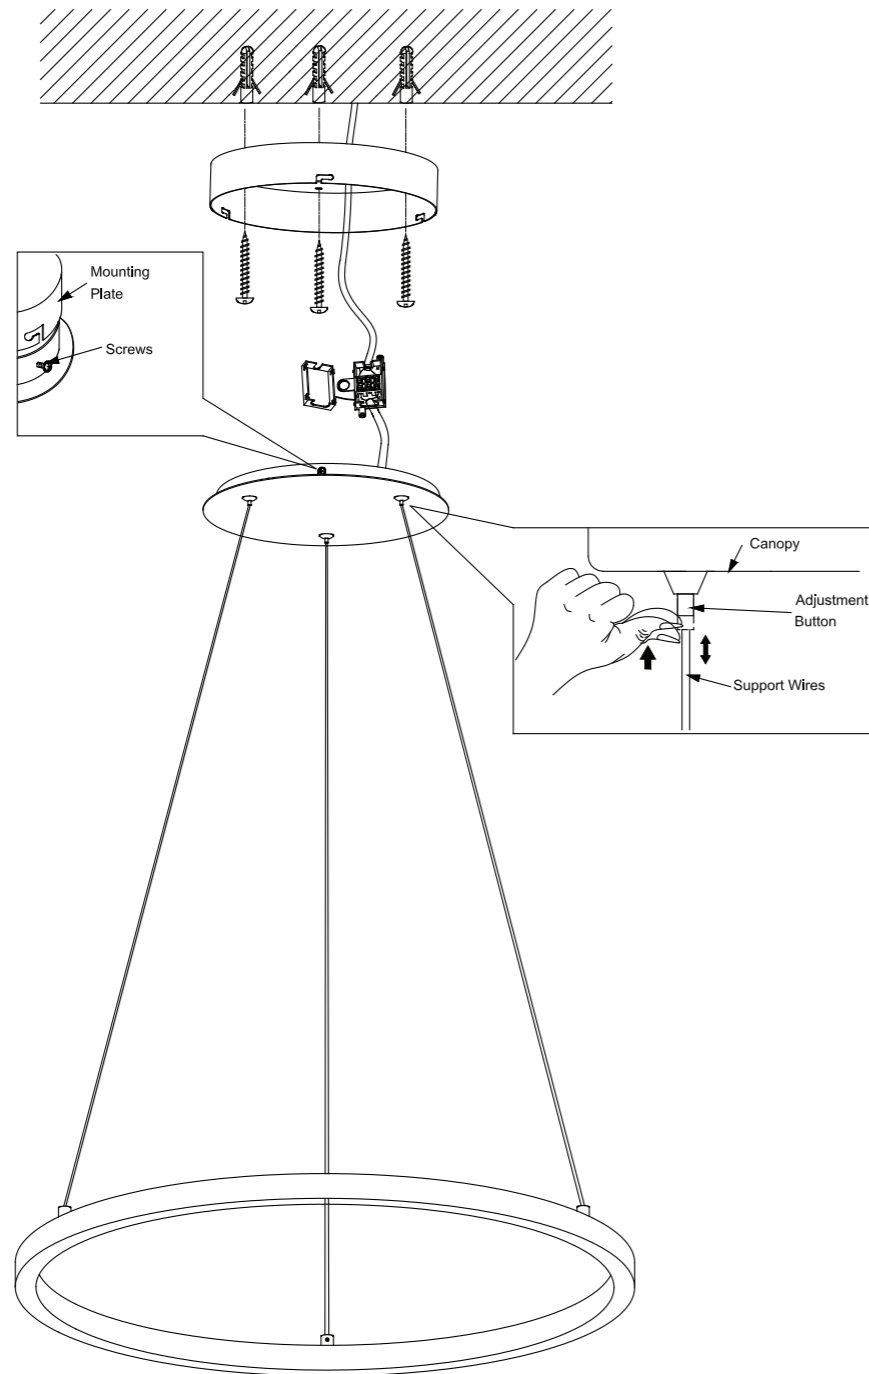

- 1 Fix the base plate to the ceiling by Root screws and Philips screws
- 2 Wiring the AC cables to the lamp
- 3 Fix the canopy to the base plate, and tighten it with screws by Philip screw driver.
- 4 Adjust the pendant cable to the satisfied height by drawing shows.

INSTRUCTIONS FOR INSTALLATION AND USE

WARNING: The security of this equipment is guaranteed only with compliance of these instructions, so you must keep them. Installation and all non-routine maintenance must be carried out only by qualified personal.

Disconnect power before taking any action on the fitting.

Blueview is not responsible for any damage to persons and/or property resulting from improper installation, misuse, or unauthorized modifications made to their products.

Obtain the correct power supply unit (accessory not included), install it in a remote location and prepare the cables for their connection

Connect to the power supply (PAYING ATTENTION TO OBSERVE POLARITY, parallel connection)

Explanation of the symbols on the label.

Due to a program of continuous improvement information is subject to change without notice.
 © Blueview 2019 – All rights reserved.
 Made in China.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD
 Tel: +86-28-8148 0011 Fax: +86-28-8148 1258
 Mail: sales@blueviewled.com
 Web.: www.blueviewled.com
 Add: No.1000, Konggang 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, China. 610207