

## 2835 Top LED Tape

### Max 24 meters run length















ChipBrand

One BIN only

Life time

Certified

Certified

Certified

Warranty



### Ra Available IP Grade Available









### **Features**

- 115LM/W Light Efficacy
- Max 24 meters run length by feeding 2 ends
- · Constant Current 24V DC system
- Epistar chips, LM-80 tested
- Cuttable every 7 LEDs
- Ra90+ /80+, with high R9 & R13 value
- Wide color temperature range, one bin only for one CCT
- Silicone extruded-IP68, Silicone coated-IP65, indoor IP22 available 3M
- · Double sided tape for easy installation
- cULus Listed, 5 years warranty

#### **BLUEVIEW ELEC-OPTIC TECH CO.,LTD**



### Max 24 meters run length

## **Specifications**


LED Type	2835	<b>Dimmable</b> Yes (compatible with BV311 RF dimmer & BV Dimmer)	
LED Q'ty/m	56pcs	IP grade IP22 (IP65,IP68 available upon reques	
Input Voltage	24VDC Constant Current	Installation	3M double sided tape(mounting clips for IP68)
Power	11.52W	Working Temperature	-25-+60 ℃
Cutting length	125mm 7 LEDs	Max run	24 meters by feeding 2 ends
Strip Width	10mm	Certification	E354137 cULus Listed, CE, RoHs
Beam Angle	120°	Warranty	5 years

Order Code	CCT/ Color	CRI	Lumen/M	Light Efficiency(Lm/W)
CN-H2835-56-24-W	1900-9000K	80+	1032-1419	110

Note: 1. Lumen output are measured according to PMS-80, with a tolerance of +/-5%

- 2. Standard package: 24m/roll
- 3. The output power must be 24V. Neither higher nor less than 24V to avoid wattage affection of the strip light.
- 4. Data above is typical value. Different LED with different CCT, value could be slightly different.

#### **Order Code**






# 2835 Top LED Tape

## Max 24 meters run length

# **Dimension**


#### Unit:mm[in]

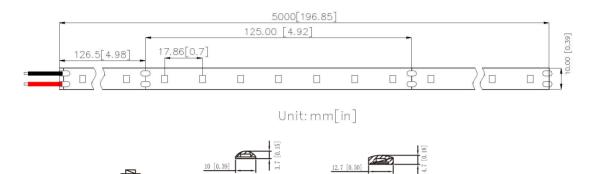

Silicone

Extrusion (WE)

# Package

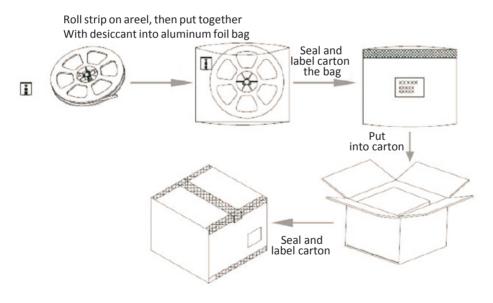

IP65

Glue coated(WS)

#### **Packing Info**

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
CN-H2835-56-24	12.0 (1±10%) kgs	14.0 (1±10%) kgs	100 rolls	550*400*340mm

Note: Data to change according to reality without prior notice.

IP22